


# 85464 Universal Bike Flag Mount assembly instructions

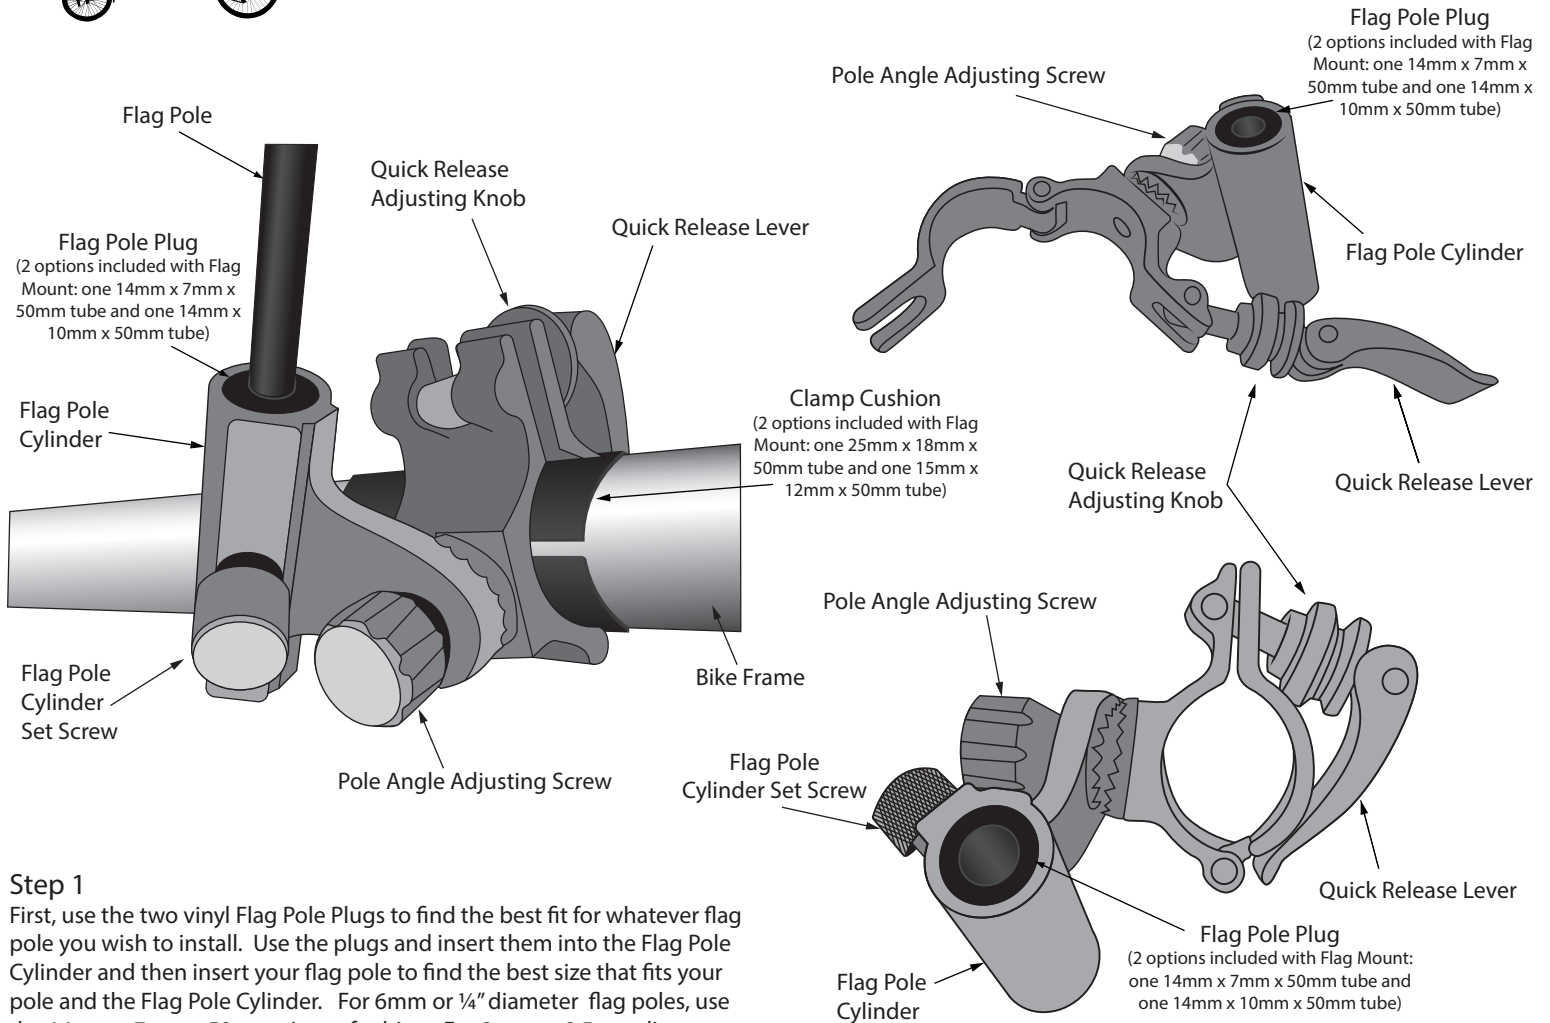

## Step 1

First, use the two vinyl Flag Pole Plugs to find the best fit for whatever flag pole you wish to install. Use the plugs and insert them into the Flag Pole Cylinder and then insert your flag pole to find the best size that fits your pole and the Flag Pole Cylinder. For 6mm or 1/4" diameter flag poles, use the 14mm x 7mm x 50mm piece of tubing. For 8mm or 9.5mm diameter poles, use the 14mm x 10mm x 50mm insert. If you have a larger diameter pole such as 1/2", you can just install your pole with no insert.

## Step 2

Once you have the optimum insert for your flag pole, take your flag pole out and fit the Universal Bike Mount to your bike frame.

## Step 3

Your Universal Bike Flag Mount is able to fit a wide range of bike frame tubing diameters by using the two Clamp Cushions included. Find a suitable place for the mount on your bike frame. Make sure the location will be free from bike cables and other existing parts of your bike that could interfere with your flag pole. Open the Quick Release and with a Clamp Cushion, carefully see how the Mount fits your chosen frame location.

You have two different Clamp Cushions to choose the best fit – one Clamp Cushion Tubing is 25mm x 18mm x 50mm and the other is 15mm x 12mm x 50mm.

Please note that the Clamp Cushions have been slit so you can fit them around bike frame tubes. In some cases you may have to slit the tubing again to make two halves to cushion the bracket from your frame.

## Step 4

Once you have the Clamp Cushions chosen for the best fit, use the Quick Release Adjusting Knob to adjust the Quick Release Lever for the best tension. Adjust the Lever so the Mount clamps firmly down on the Clamp Cushions. The Quick Release Lever should be engaged tight enough to securely hold the Bike Mount but not so tight that it damages the clamp or bike frame.

## Step 5

When you have secured your Mount to your frame, use the Pole Angle Adjusting Screw to set the angle of your flag pole. Usually a good angle is 5 to 15 degrees leaning backward however you can adjust Flag Pole Cylinder to different angles.

## Step 6

Finally, insert your flag pole and use the Flag Pole Cylinder Set Screw to tighten and secure your flag pole to your mount. Once your flag pole is secure, check for the angle of the pole on the frame and adjust if necessary.

**WARNING:** Universal Bike Flag Mount must be installed with Clamp Cushions or Mount may seriously scratch frame. Premier Designs is not responsible for damages incurred on bike frames with the use of the Universal Bike Flag Mount.



**PREMIER DESIGNS**

888-416-0174

bikeflags.com